


Ordering Information

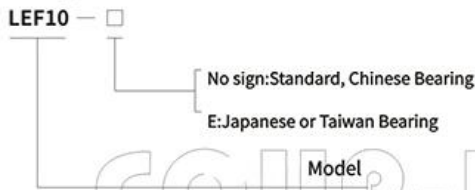

COUP-LINK®


Dimensions

(unit): mm

Model	d	L	B	H	b	h1 ^{±0.02}	B1	H1	P	d1	d2	h	(g)
LEF6-E	6	12	42	25	21	13	18	20	30	5.5	9.5	11	70
LEF8-E	6	14	52	32	26	17	25	26	38	6.6	11	12	130
LEF10 LEF10-E	8	20	70	43	35	25	36	24	52	9	—	—	330
LEF12 LEF12-E	10	20	70	43	35	25	36	24	52	9	—	—	320
LEF15 LEF15-E	15	20	80	49	40	30	41	25	60	9	—	—	380
LEF20 LEF20-E	20	26	95	58	47.5	30	56	25	75	11	—	—	630

LFF LEF LBF

Recommended Shaft And Shape(Floated Side) —LFF、LEF、LBF

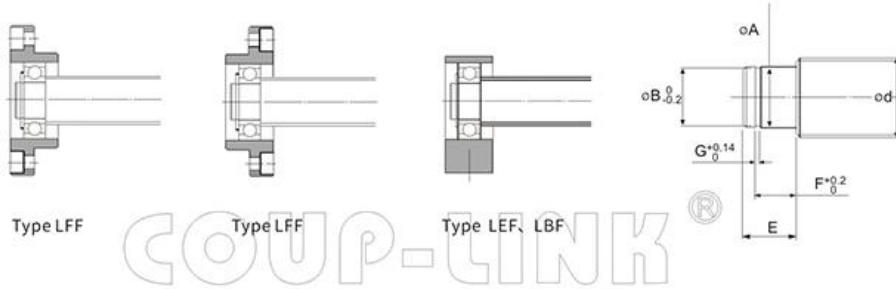

(unit) : mm

Model			Ball Screw Shaft OD	Shaft Support Portion OD		Snap-ring Groove		
Type LFF	Type LEF	Type LBF	d	A	E	B	F	G
LFF6	LEF6	---	8	6 ^{+0.015} _{-0.015}	9	5.7	6.8	0.8
---	LEF8	---	10	6 ^{+0.015} _{-0.015}	9	5.7	6.8	0.8
LFF10	LEF10	LBF10	12.14.15	8 ^{+0.015} _{-0.015}	10	7.6	7.9	0.9
LFF12	LEF12	LBF12	14.15.16	10 ^{+0.015} _{-0.015}	11	9.6	9.15	1.15
LFF15	LEF15	LBF15	18.20	15 ^{+0.015} _{-0.015}	13	14.3	10.15	1.15
LFF17	---	LBF17	20.25	17 ^{+0.015} _{-0.015}	16	16.2	13.15	1.15
LFF20	LEF20	LBF20 NOTE	25.28.30	20 ^{+0.015} _{-0.015}	19(16)	19	15.35(13.35)	1.35
LFF25	---	LBF25	30.32.36	25 ^{+0.015} _{-0.015}	20	23.9	16.35	1.35
LFF30	---	LBF30	36.40	30 ^{+0.015} _{-0.015}	21	28.6	17.75	1.75
---	---	LBF35	40.45	35 ^{+0.015} _{-0.015}	22	33	18.75	1.75
---	---	LBF40	50.55	40 ^{+0.015} _{-0.015}	23	38	19.95	1.95

Note:

In this table, dimensions in Parentheses are those of type LBF20. These dimensions differ from those of type LFF 20 and LEF20. When placing an order, always specify the model number of the support unit to be used.